

# INSTALLATION INSTRUCTIONS



## ELITE 5000 SPEAKER/VRA COMBO



1. Can be used with any XM-5000 3D Toy VRA System (Can be retrofitted)
2. Select orientation of speaker on top or VRA on top position
3. Attach mounting bracket 1/2" below speaker height in corners of sound room
4. Insert XM-5000 VRA into front opening of speaker cabinet routing cables out the back.
5. Hook up speaker wires to terminals on back of speaker. Connect VRA cables
6. Position speaker above mounting bracket and lower onto bracket until seated .
7. Secure foam speaker grill onto Velcro strips to fit snugly (Foam grill can be detached for cleaning)




Corner Mounting Bracket



VRA Positioned on top

Speaker Wire  
Terminals

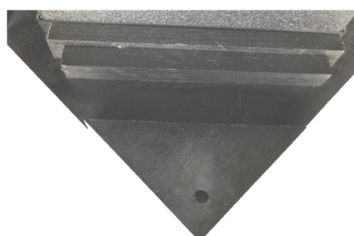

Mounting Hole



**PEHRATEK PRODUCTS**  
9285 Pierson Lake Drive  
Chaska, MN 55318  
(952) 470-9063